

## Features

- Low profile package
- Ideal for automated placement
- Glass passivated pallet chip junction
- Super fast reverse recovery time
- Low switching losses, high efficiency
- High forward surge capability

## Applications

For use in high frequency rectification and freewheeling application in switching mode converters and inverters for consumer, computer, automotive, and telecommunication.

## Mechanical Data

- Case: DO-214AC(SMA)  
Molding compound meets UL 94V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Cathode line denotes the cathode end


## Reverse Voltage

50-1000 V

## Forward Current

1 Ampere

## DO-214AC(SMA)







## Maximum Ratings ( Ta=25℃ Unless otherwise specified)

| PARAMETER                                                                              | SYMBOL           | UNIT  | US1A      | US1B | US1D | US1G | US1J | US1K | US1M |
|----------------------------------------------------------------------------------------|------------------|-------|-----------|------|------|------|------|------|------|
| Device marking code                                                                    |                  |       | US1A      | US1B | US1D | US1G | US1J | US1K | US1M |
| Maximum Repetitive Peak Reverse Voltage                                                | $V_{RRM}$        | V     | 50        | 100  | 200  | 400  | 600  | 800  | 1000 |
| Maximum RMS Voltage                                                                    | $V_{RMS}$        | V     | 35        | 70   | 140  | 280  | 420  | 560  | 700  |
| Maximum DC blocking Voltage                                                            | $V_{DC}$         | V     | 50        | 100  | 200  | 400  | 600  | 800  | 1000 |
| Maximum Average Forward Rectified Current @ 60Hz sinewave, Resistance load, TL (Fig.1) | $I_{F(AV)}$      | A     | 1.0       |      |      |      |      |      |      |
| Non-repetitive Peak Forward Surge Current @ t=8.3ms Half-sine wave                     | $I_{FSM}$        | A     | 30.0      |      |      |      |      |      |      |
| Storage temperature                                                                    | $T_{stg}$        | °C    | -55 ~+150 |      |      |      |      |      |      |
| Junction temperature                                                                   | $T_j$            | °C    | -55 ~+150 |      |      |      |      |      |      |
| Typical Thermal Resistance                                                             | $R_{\theta J-A}$ | °C /W | 80        |      |      |      |      |      |      |
|                                                                                        | $R_{\theta J-L}$ | °C /W | 30        |      |      |      |      |      |      |

**Electrical Characteristics** (Ta=25°C Unless otherwise noted)

| PARAMETER                                              | TEST CONDITIONS                                                  | SYMBOL          | UNIT | US1A | US1B | US1D | US1G | US1J | US1K | US1M |
|--------------------------------------------------------|------------------------------------------------------------------|-----------------|------|------|------|------|------|------|------|------|
| Maximum instantaneous forward voltage                  | I <sub>F</sub> =1.0A                                             | V <sub>F</sub>  | V    | 1.0  |      |      | 1.4  | 1.7  |      |      |
| Maximum reverse recovery time                          | I <sub>F</sub> =0.5A,I <sub>R</sub> =1.0A,I <sub>rr</sub> =0.25A | T <sub>rr</sub> | ns   | 50   |      |      |      | 75   |      |      |
| Maximum DC reverse currentat rated DC blocking voltage | V <sub>R</sub> =V <sub>DC</sub> , T <sub>A</sub> =25°C           | I <sub>R1</sub> | μA   | 5.0  |      |      |      |      |      |      |
|                                                        | V <sub>R</sub> =V <sub>DC</sub> , T <sub>A</sub> =100°C          | I <sub>R2</sub> |      | 500  |      |      |      |      |      |      |
| Typical junction capacitance                           | 4.0V DC,1MHz                                                     | C <sub>J</sub>  | pF   | 20   |      |      |      |      |      |      |

**Ratings And Characteristics Curves** (Ta=25°C Unless otherwise specified)

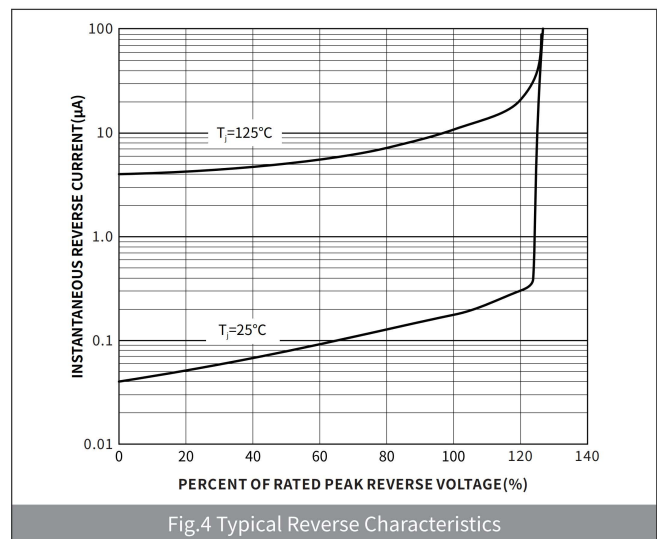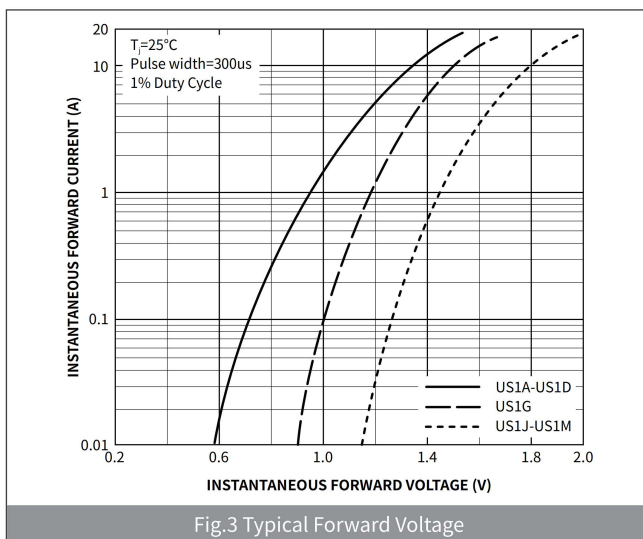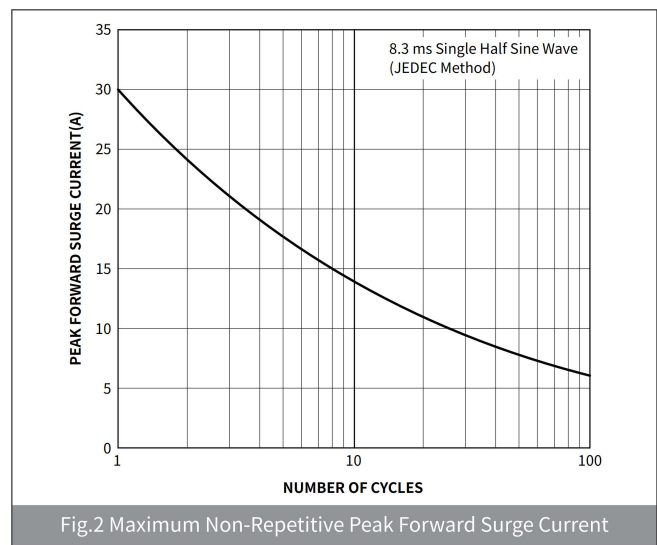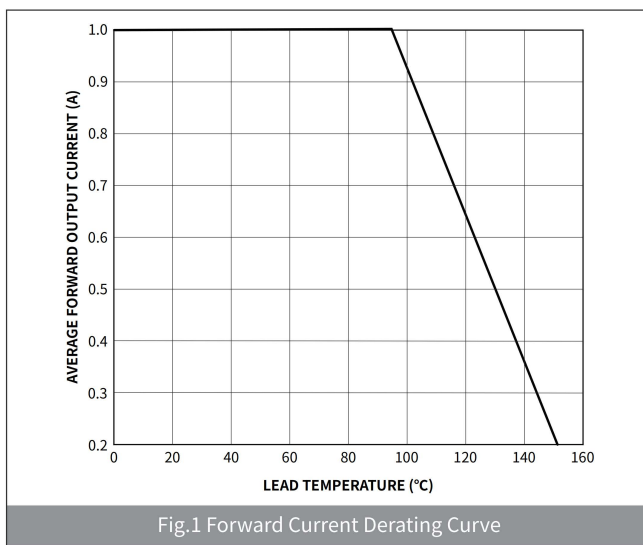

Ordering Information

| PACKAGE | PACKAGE CODE | UNIT WEIGHT(g) | REEL(pcs) | BOX(pcs) | CARTON(pcs) | DELIVERY MODE |
|---------|--------------|----------------|-----------|----------|-------------|---------------|
| SMA     | R2           | 0.07           | 5000      | 10000    | 80000       | 11"           |
| SMA     | R3           | 0.07           | 7500      | 15000    | 120000      | 13"           |

Package Outline Dimensions (SMA/DO-214AC)

| Symbol | Dimensions  |       |        |       |
|--------|-------------|-------|--------|-------|
|        | Millimeters |       | Inches |       |
|        | Min.        | Max.  | Min.   | Max.  |
| A      | 1.25        | 1.65  | 0.049  | 0.065 |
| B      | 3.95        | 4.65  | 0.156  | 0.183 |
| C      | 2.35        | 2.85  | 0.093  | 0.112 |
| D      | 1.98        | 2.41  | 0.078  | 0.095 |
| E      | 0.76        | 1.52  | 0.030  | 0.060 |
| F      | -           | 0.203 | -      | 0.008 |
| G      | 4.70        | 5.30  | 0.185  | 0.209 |
| H      | 0.15        | 0.31  | 0.006  | 0.012 |

Suggested Pad Layout

| Symbol | Dimensions  |      |        |       |
|--------|-------------|------|--------|-------|
|        | Millimeters |      | Inches |       |
|        | Min.        | Max. | Min.   | Max.  |
| M      | 1.70        | -    | 0.067  | -     |
| J      | 2.10        | -    | 0.082  | -     |
| K      | -           | 2.30 | -      | 0.090 |