



Features

- Low profile package
- Ideal for automated placement
- Guardring for overvoltage protection
- Low power losses, high efficiency
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260°C

Reverse Voltage
20-200 V

Forward Current
3 Ampere

DO-214AC(SMA)



Applications

These Schottky barrier diodes are designed for high speed switching applications, circuit protection, and voltage clamping.

Mechanical Data

- Case: DO-214AC(SMA)
Molding compound meets UL 94V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Cathode line denotes the cathode end

Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SS52	SS53	SS54	SS55	SS56	SS58	SS510	SS515	SS520
Device marking code			SS52	SS53	SS54	SS55	SS56	SS58	SS510	SS515	SS520
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	V	20	30	40	50	60	80	100	150	200
Maximum RMS Voltage	V _{RMS}	V	14	21	28	35	42	56	70	105	140
Maximum DC blocking Voltage	V _{DC}	V	20	30	40	50	60	80	100	150	200
Average rectified output current @60Hz sinewave, Resistance load,TL (Fig.1)	I _{F(AV)}	A	5								
Forward Surge Current (Nonrepetitive) @60HzHalf-sine wave,1 cycle, T=25°C	I _{FSM}	A	120								
Storage temperature	T _{stg}	°C	-55 ~ +150								
Junction temperature	T _j	°C	-55 ~ +125					-55 ~ +150			
Typical Thermal Resistance	R _{θJ-A}	°C /W	60								
	R _{θJ-L}	°C /W	22								

Electrical Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER	TEST CONDITIONS		SYMBOL	UNIT	SS52	SS53	SS54	SS55	SS56	SS58	SS510	SS515	SS520
Maximum instantaneous forward voltage	I _F =5.0A		V _F	V	0.55			0.70		0.85		0.95	
Maximum DC reverse current at rated DC blocking voltage	V _{RM} =V _{RRM}	VA=25°C	I _R	mA	0.2					0.05			
		VA=100°C			10					5			
Typical junction capacitance	4.0V DC,1MHz		C _J	pF	200								

Ratings And Characteristics Curves (Ta=25°C Unless otherwise specified)

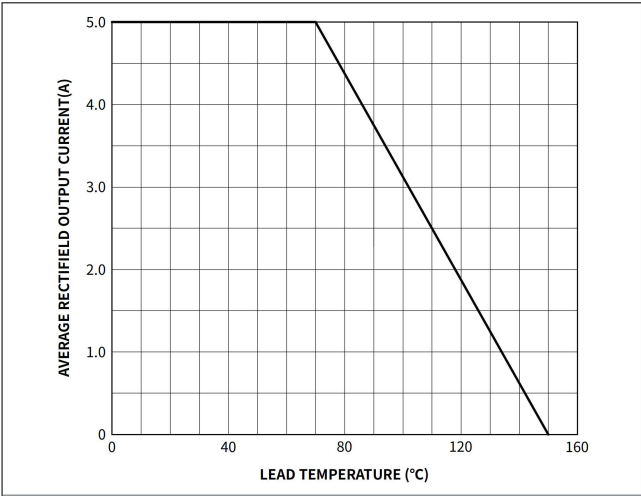


Fig. 1 - Forward Current Derating Curve

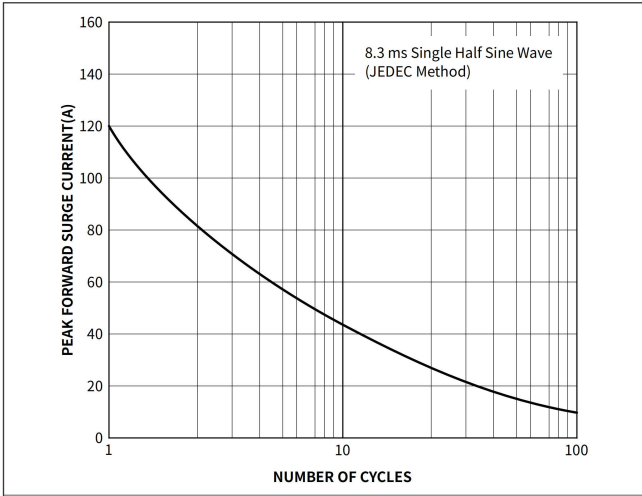


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

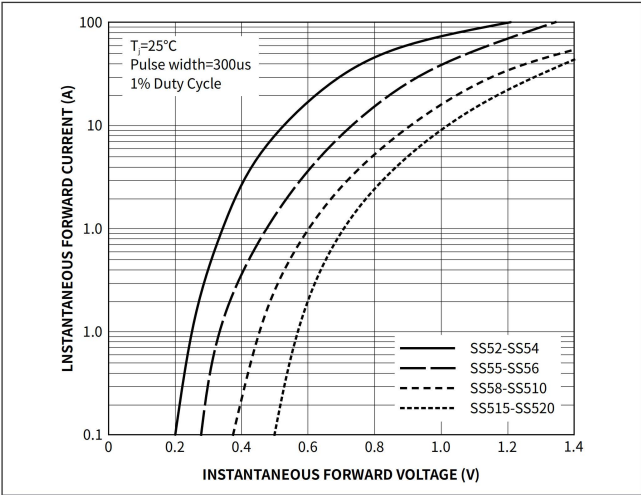


Fig.3 Typical Forward Voltage

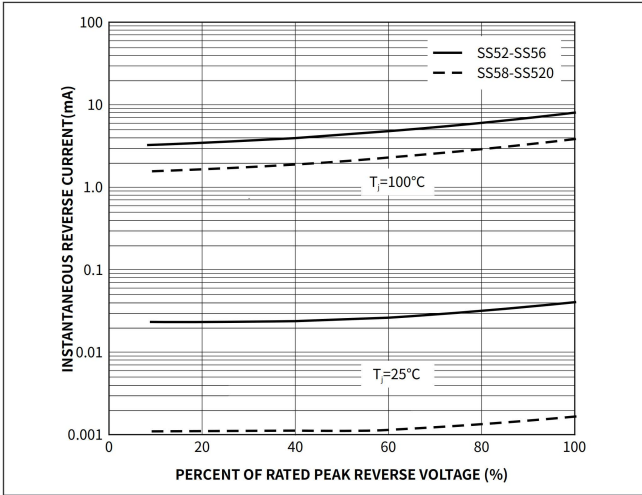
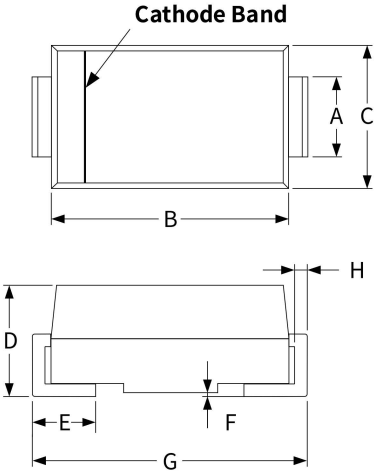


Fig.4 Typical Reverse Characteristics


Ordering Information

PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SMA	R2	0.07	5000	10000	80000	11"
SMA	R3	0.07	7500	15000	120000	13"

Package Outline Dimensions (SMA/DO-214AC)

	Symbol	Dimensions			
		Millimeters		Inches	
		Min.	Max.	Min.	Max.
A		1.25	1.65	0.049	0.065
B		3.95	4.65	0.156	0.183
C		2.35	2.85	0.093	0.112
D		1.98	2.41	0.078	0.095
E		0.76	1.52	0.030	0.060
F		-	0.203	-	0.008
G		4.70	5.30	0.185	0.209
H		0.15	0.31	0.006	0.012

Suggested Pad Layout

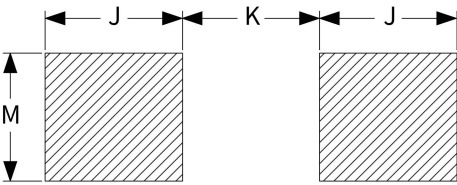	Symbol	Dimensions			
		Millimeters		Inches	
		Min.	Max.	Min.	Max.
M		1.70	-	0.067	-
J		2.10	-	0.082	-
K		-	2.30	-	0.090